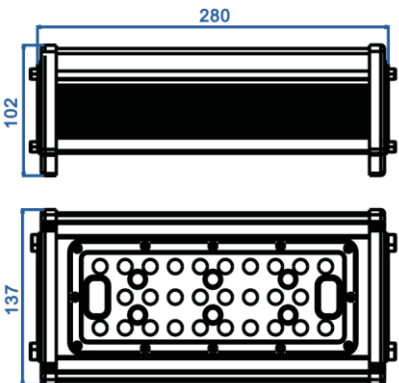


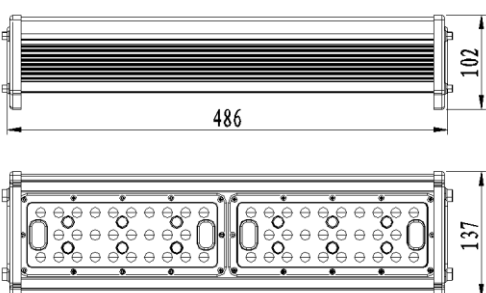
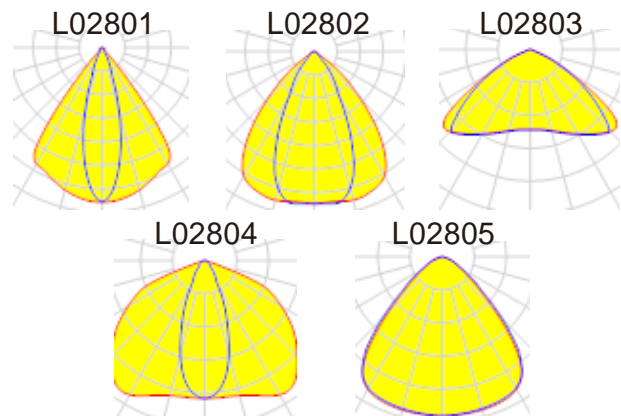

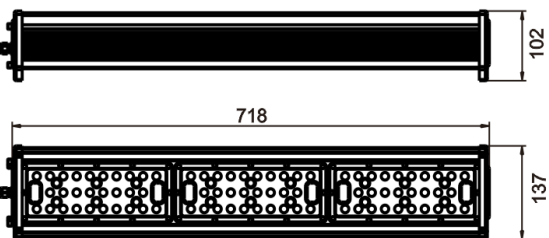
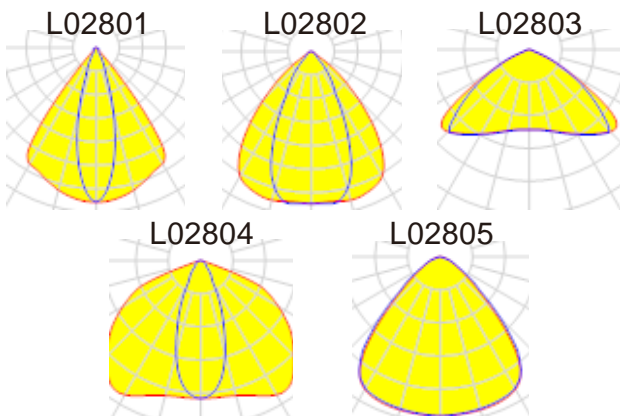

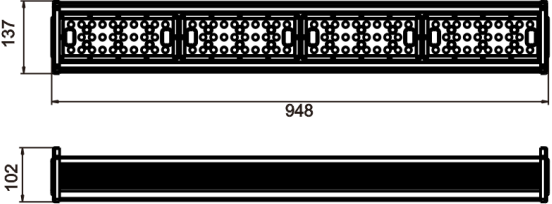
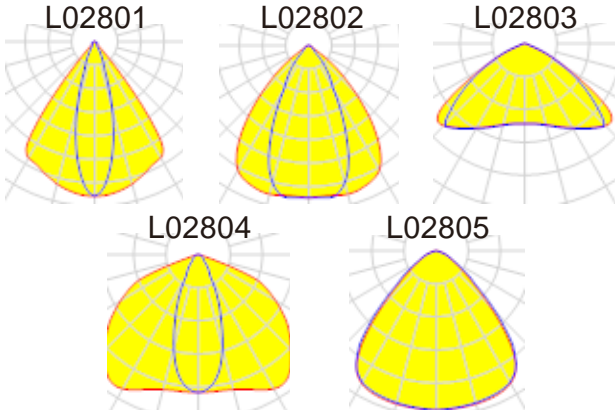

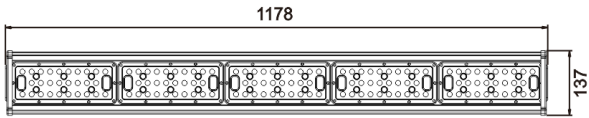
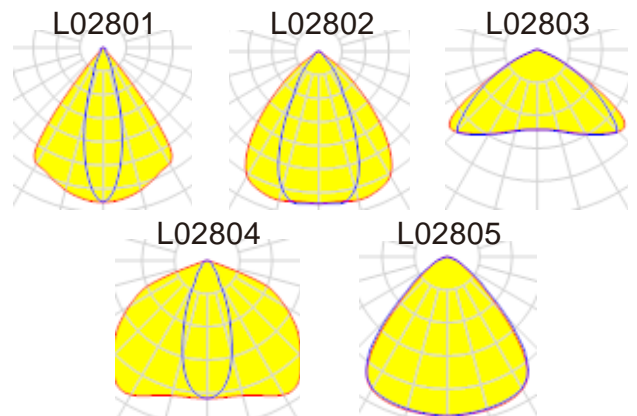


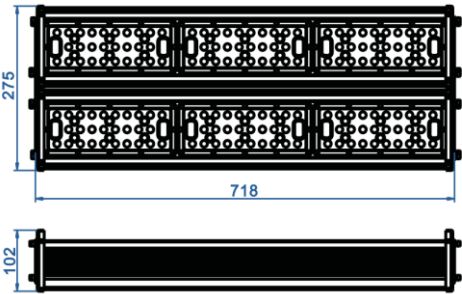
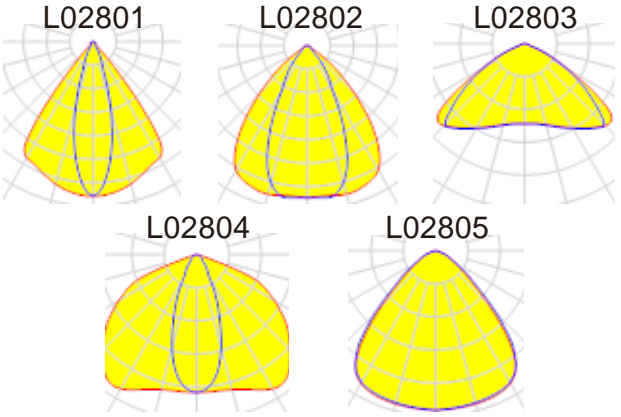
	Product Name	Majimoto 30W Linea Series LED High Bay	
	Item No.	HB-L-30W	
Optical Data		Electrical Data	
LED Type	Nichia	Power Supply	Meanwell
System Efficacy	130(±5%)lm/W(5000K Ra70)	Input Voltage	AC100-240V / AC100-277V
Luminous Flux	3900(±5%)lm(5000K Ra70)	Power Frequency	50/60Hz
CCT	3000K, 4000K, 5000K	Output Voltage	DC24-48V
Beam Angle	30°x70°, 60°x90°, 120°, 90°, 40°x130°	Output Current	0.7A(Constant Current)
CRI	Ra70 / Ra80	Power Efficiency	>93%
System Efficiency	>90%	Power Factor	>0.93
		Total Harmonic Distortion	<15%
Others			
System Power Consumption	30±3W	Junction Temperature(Tj)	<75°C(Ta=30°C)
LED Power Consumption	28±3W	Storage Temperature	-40~+70°C
Fixture Material	Aluminum Alloy	Operating Temperature	-30~+50°C
Ingress Protection	IP65	Operating Humidity	15~90%RH
Luminaire Net Weight	1.9±0.3kg	Outlook Dimensions	280×137×102mm
Life Span	>50000Hrs(Ta=30°C @L70)	Export Carton Size	350×200×160mm
Optional Info.			
Installation Method	Loop Hanging / Ceiling Mounting		
Fixture Color	Black/White/Black Body&Red Front		
Intelligent Control	Dimmable / DALI / Microwave sensor / Zigbee		
Physical Dimensions		Light Distribution Curve	
			


	Product Name	Majimoto 60W Linea Series LED High Bay	
	Item No.	HB-L-60W	
Optical Data		Electrical Data	
LED Type	Nichia	Power Supply	Meanwell
System Efficacy	130(±5%)lm/W(5000K Ra70)	Input Voltage	AC100-240V / AC100-277V
Luminous Flux	7800(±5%)lm(5000K Ra70)	Power Frequency	50/60Hz
CCT	3000K, 4000K, 5000K	Output Voltage	DC24-48V
Beam Angle	30°x70°, 60°x90°, 120°, 90°, 40°x130°	Output Current	1.3A(Constant Current)
CRI	Ra70 / Ra80	Power Efficiency	>93%
System Efficiency	>90%	Power Factor	>0.93
		Total Harmonic Distortion	<15%
Others			
System Power Consumption	60±3W	Junction Temperature(Tj)	<75°C(Ta=30°C)
LED Power Consumption	56±3W	Storage Temperature	-40~+70°C
Fixture Material	Aluminum Alloy	Operating Temperature	-30~+50°C
Ingress Protection	IP65	Operating Humidity	15~90%RH
Luminaire Net Weight	3.4±0.3kg	Outlook Dimensions	486×137×102mm
Life Span	>50000Hrs(Ta=30°C @L70)	Export Carton Size	555×200×160mm
Optional Info.			
Installation Method	Loop Hanging / Ceiling Mounting		
Fixture Color	Black/White/Black Body&Red Front		
Intelligent Control	Dimmable / DALI / Microwave sensor / Zigbee		
Physical Dimensions		Light Distribution Curve	
			

	Product Name	Majimoto 90W Linea Series LED High Bay	
	Item No.	HB-L-90W	
Optical Data		Electrical Data	
LED Type	Nichia	Power Supply	Meanwell
System Efficacy	135(±5%)lm/W(5000K Ra70)	Input Voltage	AC100-240V / AC100-277V
Luminous Flux	12150(±5%)lm(5000K Ra70)	Power Frequency	50/60Hz
CCT	3000K, 4000K, 5000K	Output Voltage	DC24-48V
Beam Angle	30°x70°, 60°x90°, 120°, 90°, 40°x130°	Output Current	1.9A(Constant Current)
CRI	Ra70 / Ra80	Power Efficiency	>93%
System Efficiency	>90%	Power Factor	>0.93
		Total Harmonic Distortion	<15%
Others			
System Power Consumption	90±4W	Junction Temperature(Tj)	<75°C(Ta=30°C)
LED Power Consumption	84±4W	Storage Temperature	-40~+70°C
Fixture Material	Aluminum Alloy	Operating Temperature	-30~+50°C
Ingress Protection	IP65	Operating Humidity	15~90%RH
Luminaire Net Weight	4.7±0.3kg	Outlook Dimensions	718×137×102mm
Life Span	>50000Hrs(Ta=30°C @L70)	Export Carton Size	790×200×160mm
Optional Info.			
Installation Method	Loop Hanging / Ceiling Mounting		
Fixture Color	Black/White/Black Body&Red Front		
Intelligent Control	Dimmable / DALI / Microwave sensor / Zigbee		
Physical Dimensions		Light Distribution Curve	
			

	Product Name	Majimoto 120W Linea Series LED High Bay	
	Item No.	HB-L-120W	
Optical Data		Electrical Data	
LED Type	Nichia	Power Supply	Meanwell
System Efficacy	135(±5%)lm/W(5000K Ra70)	Input Voltage	AC100-240V / AC100-277V
Luminous Flux	16200(±5%)lm(5000K Ra70)	Power Frequency	50/60Hz
CCT	3000K, 4000K, 5000K	Output Voltage	DC24-48V
Beam Angle	30°x70°, 60°x90°, 120°, 90°, 40°x130°	Output Current	2.6A(Constant Current)
CRI	Ra70 / Ra80	Power Efficiency	>93%
System Efficiency	>90%	Power Factor	>0.93
		Total Harmonic Distortion	<15%
Others			
System Power Consumption	120±6W	Junction Temperature(Tj)	<75°C(Ta=30°C)
LED Power Consumption	112±6W	Storage Temperature	-40~+70°C
Fixture Material	Aluminum Alloy	Operating Temperature	-30~+50°C
Ingress Protection	IP65	Operating Humidity	15~90%RH
Luminaire Net Weight	5.7±0.3kg	Outlook Dimensions	948×137×102mm
Life Span	>50000Hrs(Ta=30°C @L70)	Export Carton Size	1020×200×160mm
Optional Info.			
Installation Method	Loop Hanging / Ceiling Mounting		
Fixture Color	Black/White/Black Body&Red Front		
Intelligent Control	Dimmable / DALI / Microwave sensor / Zigbee		
Physical Dimensions		Light Distribution Curve	
			

	Product Name	Majimoto 150W Linea Series LED High Bay	
	Item No.	HB-L-150W	
Optical Data		Electrical Data	
LED Type	Nichia	Power Supply	Meanwell
System Efficacy	135(±5%)lm/W(5000K Ra70)	Input Voltage	AC100-240V / AC100-277V
Luminous Flux	20250(±5%)lm(5000K Ra70)	Power Frequency	50/60Hz
CCT	3000K, 4000K, 5000K	Output Voltage	DC24-48V
Beam Angle	30°x70°, 60°x90°, 120°, 90°, 40°x130°	Output Current	3.2A(Constant Current)
CRI	Ra70 / Ra80	Power Efficiency	>93%
System Efficiency	>90%	Power Factor	>0.93
		Total Harmonic Distortion	<15%
Others			
System Power Consumption	150±7W	Junction Temperature(Tj)	<75°C(Ta=30°C)
LED Power Consumption	140±7W	Storage Temperature	-40~+70°C
Fixture Material	Aluminum Alloy	Operating Temperature	-30~+50°C
Ingress Protection	IP65	Operating Humidity	15~90%RH
Luminaire Net Weight	6.9±0.3kg	Outlook Dimensions	1178×137×102mm
Life Span	>50000Hrs(Ta=30°C @L70)	Export Carton Size	1250×200×160mm
Optional Info.			
Installation Method	Loop Hanging / Ceiling Mounting		
Fixture Color	Black/White/Black Body&Red Front		
Intelligent Control	Dimmable / DALI / Microwave sensor / Zigbee		
Physical Dimensions		Light Distribution Curve	
			
			

	Product Name	Majimoto 180W Linea Series LED High Bay	
	Item No.	HB-L-180W	
Optical Data		Electrical Data	
LED Type	Nichia	Power Supply	Meanwell
System Efficacy	135(±5%)lm/W(5000K Ra70)	Input Voltage	AC100-240V / AC100-277V
Luminous Flux	24300(±5%)lm(5000K Ra70)	Power Frequency	50/60Hz
CCT	3000K, 4000K, 5000K	Output Voltage	DC24-48V
Beam Angle	30°x70°, 60°x90°, 120°, 90°, 40°x130°	Output Current	3.8A(Constant Current)
CRI	Ra70 / Ra80	Power Efficiency	>93%
System Efficiency	>90%	Power Factor	>0.93
		Total Harmonic Distortion	<15%
Others			
System Power Consumption	180±9W	Junction Temperature(Tj)	<75°C(Ta=30°C)
LED Power Consumption	168±9W	Storage Temperature	-40~+70°C
Fixture Material	Aluminum Alloy	Operating Temperature	-30~+50°C
Ingress Protection	IP65	Operating Humidity	15~90%RH
Luminaire Net Weight	8.5±0.3kg	Outlook Dimensions	718×275×102mm
Life Span	>50000Hrs(Ta=30°C @L70)	Export Carton Size	790×338×160mm
Optional Info.			
Installation Method	Loop Hanging / Ceiling Mounting		
Fixture Color	Black/White/Black Body&Red Front		
Intelligent Control	Dimmable / DALI / Microwave sensor / Zigbee		
Physical Dimensions		Light Distribution Curve	
			

		Product Name		Majimoto 240W Linea Series LED High Bay	
		Item No.		HB-L-240W	
Optical Data			Electrical Data		
LED Type	Nichia		Power Supply	Meanwell	
System Efficacy	135(±5%)lm/W(5000K Ra70)		Input Voltage	AC100-240V / AC100-277V	
Luminous Flux	32400(±5%)lm(5000K Ra70)		Power Frequency	50/60Hz	
CCT	3000K, 4000K, 5000K		Output Voltage	DC24-48V	
Beam Angle	30°x70°, 60°x90°, 120°, 90°, 40°x130°		Output Current	5.0A(Constant Current)	
CRI	Ra70 / Ra80		Power Efficiency	>93%	
System Efficiency	>90%		Power Factor	>0.93	
			Total Harmonic Distortion	<15%	
Others					
System Power Consumption	240±12W		Junction Temperature(Tj)	<75 °C (Ta=30 °C)	
LED Power Consumption	224±12W		Storage Temperature	-40~+70 °C	
Fixture Material	Aluminum Alloy		Operating Temperature	-30~+50 °C	
Ingress Protection	IP65		Operating Humidity	15~90%RH	
Luminaire Net Weight	10.3±0.3kg		Outlook Dimensions	948×275×102mm	
Life Span	>50000Hrs(Ta=30 °C @L70)		Export Carton Size	1020×338×160mm	
Optional Info.					
Installation Method	Loop Hanging / Ceiling Mounting				
Fixture Color	Black/White/Black Body&Red Front				
Intelligent Control	Dimmable / DALI / Microwave sensor / Zigbee				
Physical Dimensions			Light Distribution Curve		
